

HD 12 VV

Tandem roller with two vibrating roller drums

Tandem rollers Series HD CompactLine / Series H200




HIGHLIGHTS HD CompactLine

- > Optimum front view due to concaving front end
- > Ergonomic driver platform
- > Modern instrument panel
- > Low machine height
- > 3-point swivel joint for optimum driving comfort
- > Central suspension point
- > Convenient maintenance and service



Machine dimensions

Total length (L)	mm	2460
Width (B)	mm	1310
Total height (H)	mm	2390
Drum width (X)	mm	1200/1200
Height loading, min. (Hl)	mm	1752

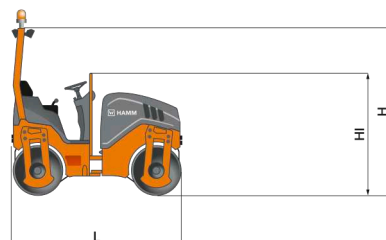

EU Stage
IIIA / EPA
Tier 4i

TECHNICAL DATA		Unit	HD 12 VV
	Weights		
	Operating weight with ROPS	kg	2695
	Operating weight, max.	kg	3410
	Static linear load, front/rear	kg/cm	11,2/11,4
	Machine dimensions		
	Total length	mm	2460
	Total height with ROPS	mm	2390
	Height loading, min.	mm	1752
	Total width	mm	1310
	Wheel base	mm	1700
	Max. working width	mm	1250
	Ground clearance, left/right	mm	570/570
	Turning radius, inside	mm	2370
	Drum dimensions		
	Drum width, front/rear	mm	1200/1200
	Drum diameter, front/rear	mm	720/720
	Drum thickness, front/rear	mm	15/15
	Drum type, front		smooth/non-divided
	Drum type, rear		smooth/non-divided
	Track offset, left/right	mm	0/50
	Diesel engine		
	Manufacturer		KUBOTA
	Version		D1503
	Number of cylinders		3
	Power rat. ISO 14396, kW/PS/rpm		22,9/31,1/2700
	Power rating SAE J1349, kW/HP/rpm		22,9/30,7/2700
	Emissions standard EU/USA		EU Stage IIIA / EPA Tier 4i
	Drive		
	Speed, infinitely variable	km/h	0 - 12,0
	Climbing ability, vibration on/off	%	30/40
	Vibration		
	Vibration frequency, front, I/II	Hz	67/52
	Vibration frequency, rear, I/II	Hz	67/52
	Amplitude, front, I/II	mm	0,52/0,52
	Amplitude, rear, I/II	mm	0,52/0,52
	Centrifugal force, front, I/II	kN	52/32
	Centrifugal force, rear, I/II	kN	52/32
	Steering		
	Oscillation angle +/-	°	8
	Steering, type		Articulated steering
	Sprinkler system		
	Water sprinkler, type		Pressure
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	42
	Water tank, capacity	L	180
	Sound level		
	Acoustic power LW(A), sticker		106
	Acoustic power LW(A), measured		105

EQUIPMENT

3-point articulation, Dashboard with displays, indicator lights and switches, Dashboard cover, lockable and weather-resistant, Handrails, Battery isolation switch, Pressure water sprinkling with interval switch, Operator's platform with entry from both sides, Hydrostatic steering, Vibration-isolated operator's platform, Track offset, Vibration front and rear, switchable single and doubled, Central lifting bracket

OPTIONAL EQUIPMENT

All-wheel lock, Tow hitch, Working lights, Back-up alarm (reversing), Driver's seat with seat heating, black imitation leather, comfort equipment, Anti-freeze injection system, Edge pressing and cutting equipment, ROPS, foldable, Rotating beacon, Plastic tarpaulin, Chip spreader, Water drain valve, V-belt protection, Plastic scraper, foldable, Automatic engine-off function, Drum edge lighting, Tow eye, at the front

HAMM AG

Hammstraße 1
D-95643 Tirschenreuth
Tel. +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu



HAMM